



▲ IRHS-VP-201

- Custom-designed and built to provide optimum efficiency for ROBERTS GORDON® vacuum-assisted infrared heating systems
- Longer life through the use of high quality materials and components such as high temperature sealed motor bearings and high temperature silicone acoustical boot
- Proper performance provided by dynamically balanced impeller

ROBERTS GORDON®

Pumps


Pumps for Low-intensity Infrared Heating Systems

Quality in Any Language™



Dimensional Data (In.)

	A	B	C	D	E	F	G
IRHS-VP-201	17.75	17	18.75	3.25	10	4.5	4.5

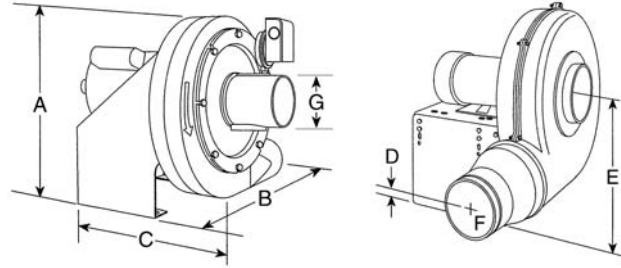

Model	IRHS-VP-201
Maximum Number of Flow Units* (CORAYVAC®)	110
Maximum Number of VANTAGE® EV Burners**	6
	6
	6
	4
	4
Motor Specifications	
Horse Power (Hp)	3/4
Phase (PH)	1
Hertz (HZ)	60
Voltage (V)	115/230
Full Load Amp (Amps)	6.6/3.3
R.P.M.	3450
Maximum Ambient Temperature	40°C
Motor Frame	56
Motor Enclosure	TENV
Thermal Overload Protection	Automatic
Duty	Continuous
Noise Level @ 5ft. (DBA)	70
Drive	Direct
Inlet/Outlet (In.)	4/4
Type Bearings	High Temperature
Warranty	Three-Year Limited (Refer to Installation, Operation and Service Manual for Details)

Material Specification	
Frame	Stamped Steel 12Ga
Scroll and Inlet	Cast Iron
Acoustic Boot	450°F Flexible Silicone
Weight (Lbs.)	112
Impeller Material	319 Cast Aluminum
Impeller Size Dia. (In.) x Width (In.)	11 x 2-5/8 Radial
Paint	Electrostatic Epoxy Powder

* Flow units are at sea level. For further detail, see CORAYVAC® Installation, Operation and Service manual.
 ** For combination of burners, see VANTAGE® EV Installation, Operation and Service manual.
 *** Note: For starter, see National Electric Code (NEC) Requirement for motors 1 HP and higher.

Installation Code: ROBERTS GORDON® products are to be installed only in accordance with local laws, codes and regulations, and only by a contractor qualified in the installation and service of gas-fired heating equipment. **This product is not for residential use.**

Further Information: Applications, engineering and detailed guidance on systems design, installation and product performance is available through ROBERTS GORDON® North American independent distributors. Please contact us for any further information you may require, including the ROBERTS GORDON® Pump Installation, Operation and Service Manuals.

Roberts-Gordon
 1250 William Street
 P.O. Box 44
 Buffalo, NY 14240-0044 USA
 Telephone: 716.852.4400
 Fax: 716.852.0854
 Toll Free: 800.828.7450
<http://www.rg-inc.com>

Roberts-Gordon Canada Inc.
 76 Main Street West, Unit 10
 Grimsby, Ontario L3M 1R6 Canada
 Telephone: 905.945.5403
 Fax: 905.945.0511
European Office:
 Roberts-Gordon
 Telephone: +44(0) 1902 494425
 Fax: +44(0) 1902 403200